




# WATER FILTER SERIES SEA WATER FILTER

As all the filters from the "ULISSE" series, the monobloc models E and G are mainly designed for use in the engine cooling system and filter the WATER coming directly from the sea cock. Thanks to the 316L stainless steel element, the specific materials of the housing and the 3 bar working pressure, these filters can be used for many other applications on board. A transparent acrylic glass, in the top cover, allows an easy and quick inspection of the filter conditions.



MATERIALS	TECHNICAL FEATURES
<b>Filter housing</b> Nickel-plated alloy, sea water corrosion proof	<b>Max working pressure :</b> 3 bar
<b>Filter element</b> Stainless steel 316L (Standard 2.000 µ)	<b>Test pressure :</b> 6 bar <b>Burst pressure :</b> 9 bar
<b>Seals</b> Neoprene	<b>Max working temperature :</b> 75° C
<b>Screws</b> Stainless steel 316L	<b>Ready for grounding</b>
<b>Inspection cover</b> Acrylic material (transparent)	<b>Manufactured with structural features according to R.I.N.A. specifications to be suitable for use on crafts.</b>

## Monobloc FILTER, 90° ports

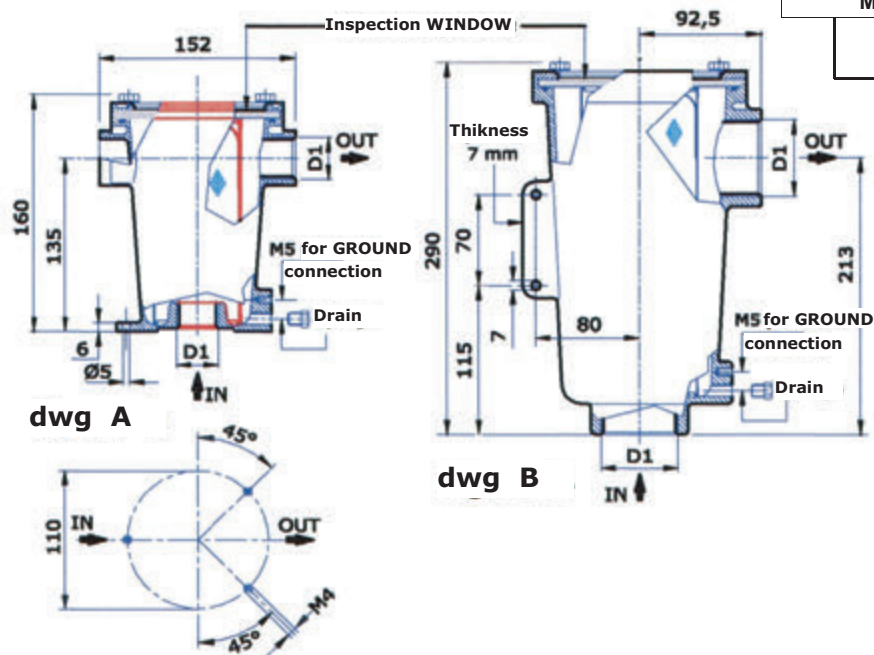

MARINE PROJECTS filter

For WATER, "ULISSE" series

**MW-E-\*\*\***


Port code	dwg	D1	Wt. (N)
B04		G 1/2"	
B06	A	G 3/4"	45
B08		G 1"	
B10		G 1 1/4"	
B12	B	G 1 1/2"	85
B16		G 2"	

**Recommended flow rates, see page 2**



# WATER FILTER SERIES SEA WATER FILTER

## Monobloc FILTER, in line ports

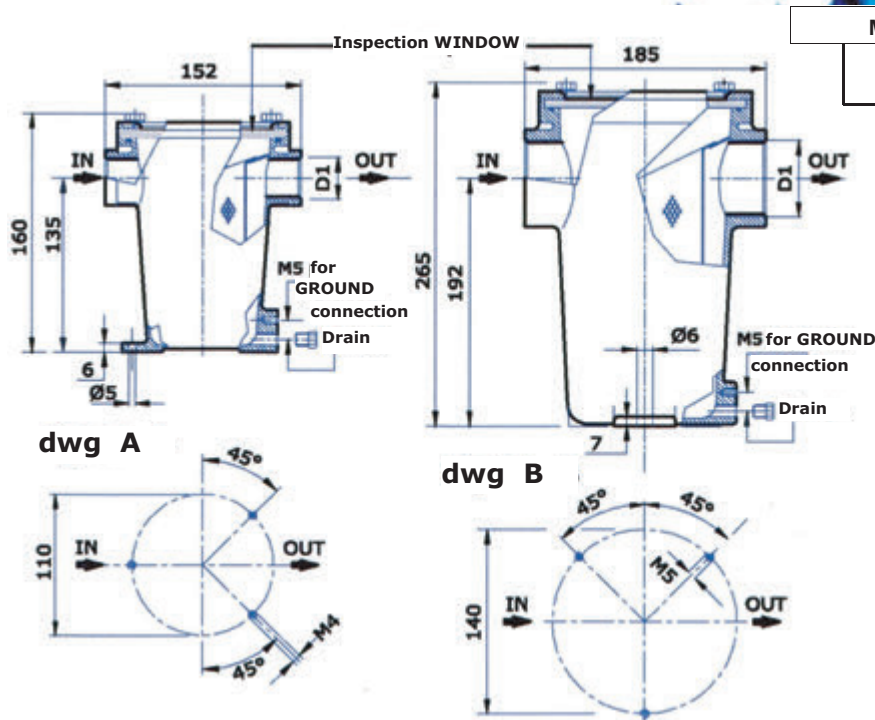

MARINE PROJECTS filter  
For WATER, "ULISSE"

**MW-G-\*\*\***

Port code	dwg	D1	Wt. (N)
B04	A	G 1/2"	45
B06		G 3/4"	
B08		G 1"	
B10	B	G 1 1/4"	85
B12		G 1 1/2"	
B16		G 2"	

Recommended flow rates, see below

### RECOMMENDED FLOW RATES (filter element 2000 μ)

Model	Port code	D1	V = 2 m/sec		V = 3 m/sec	
			Flow rate (l/min)	Δp (mm H <sub>2</sub> O)	Flow rate (l/min)	Δp (mm H <sub>2</sub> O)
MWE MWG	B04	G 1/2"	23	590	35	1.435
	B06	G 3/4"	40	560	62	1.250
	B08	G 1"	66	465	100	1.160
	B10	G 1 1/4"	116	470	175	1.200
	B12	G 1 1/2"	160	480	236	1.150
	B16	G 2"	260	445	400	1.050

SPARE PARTS	
DESCRIPTION	CODE
Acrylic inspection cover	<b>S33</b>
Seal kit	<b>S34</b>
Basket	<b>S55</b>

HOW TO ORDER	
FILTER COMPLETE	SPARE PART
<p><i>Example</i> Monoblocco filter, in line 1 1/4" BSPT ports Filter model MW -G-B10 or "ULISSE" G -B10</p>	<p><i>Example</i> Acrylic inspection cover for MW-G-B10 S3-MW-G-B10</p>